
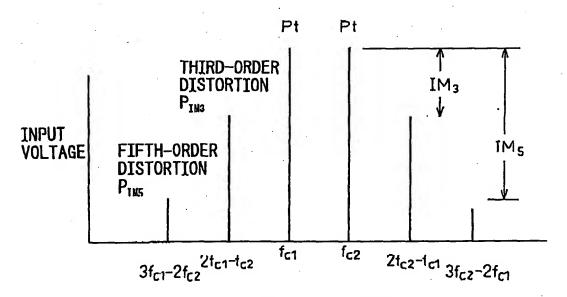


Fig.3

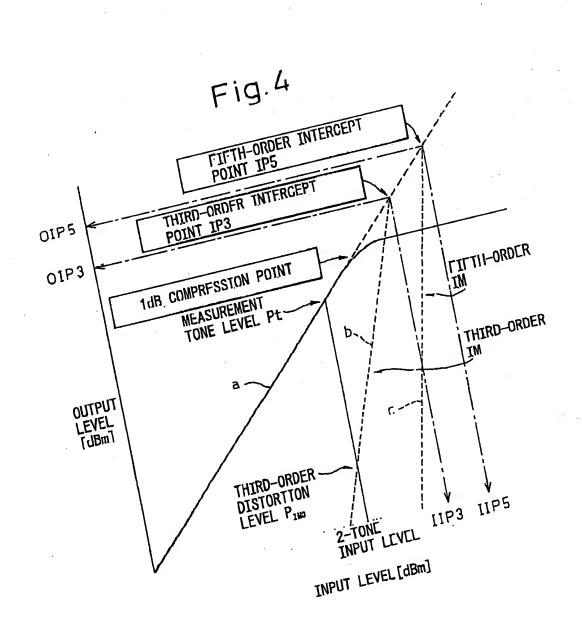

INPUT FREQUENCY

18. Aug. 2003 17:45





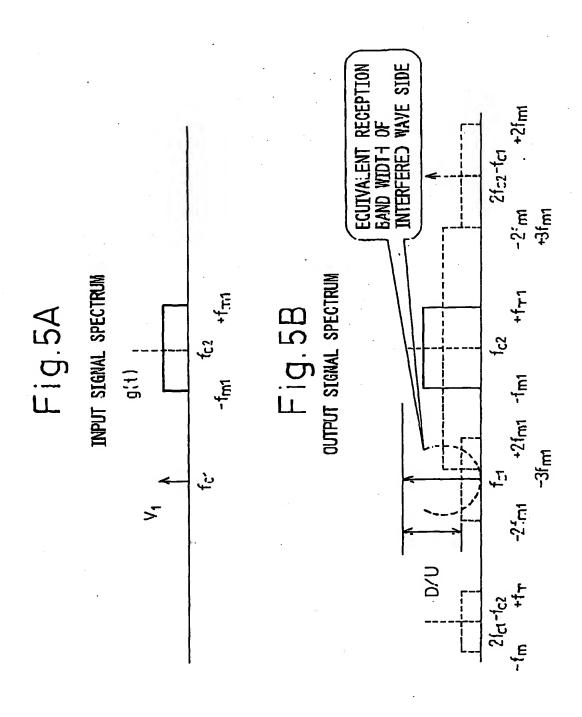


Fig.6



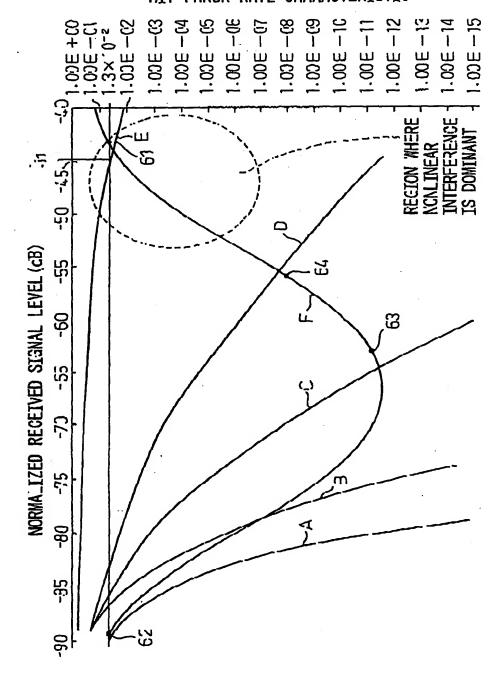

7/15 INTERFERENCE
CHARACTERISTIC
ESTIMATING MEANS MEASURING DEVICE (RECEIVING) SIDE ERROR RATI DIGITAL WIRELESS DEVICE VARIABLE ATTENUATOR 2 HYBRID COMPOSIT CIRCUIT VAKIABLE ATTENUATOR VARIABLE 5 INTERFERING DIGITAL WIRELESS DEVICE 15 DIGITAL Wireless Device INTERFERING MODULATED ERROR RATE MEASURING DEVICE SEGNAL GENERATOR

Fig.7

Fig.8



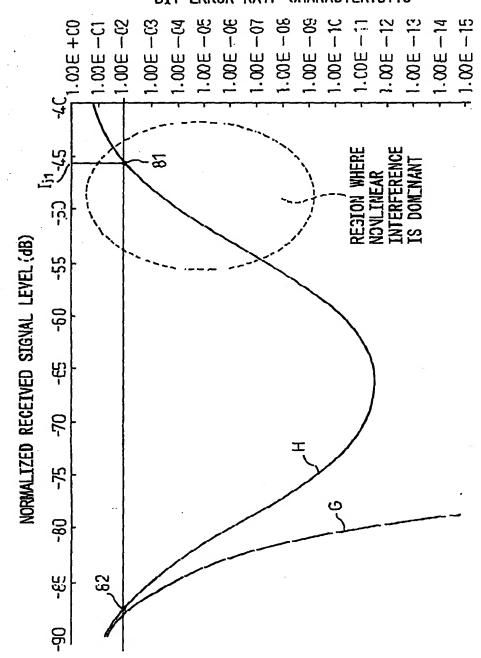
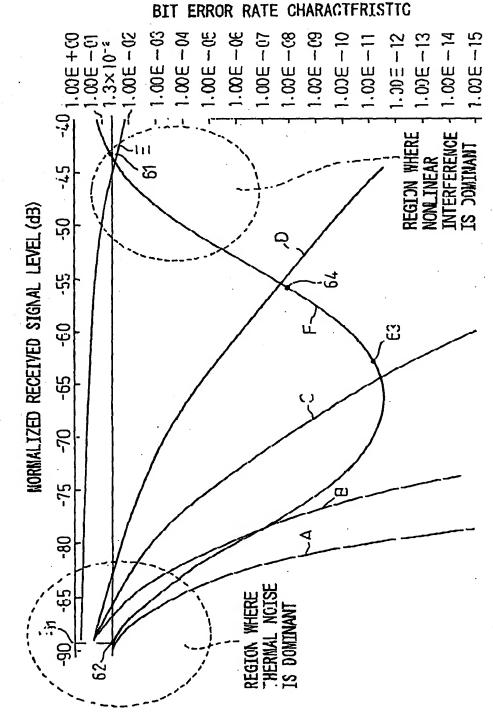


Fig.9







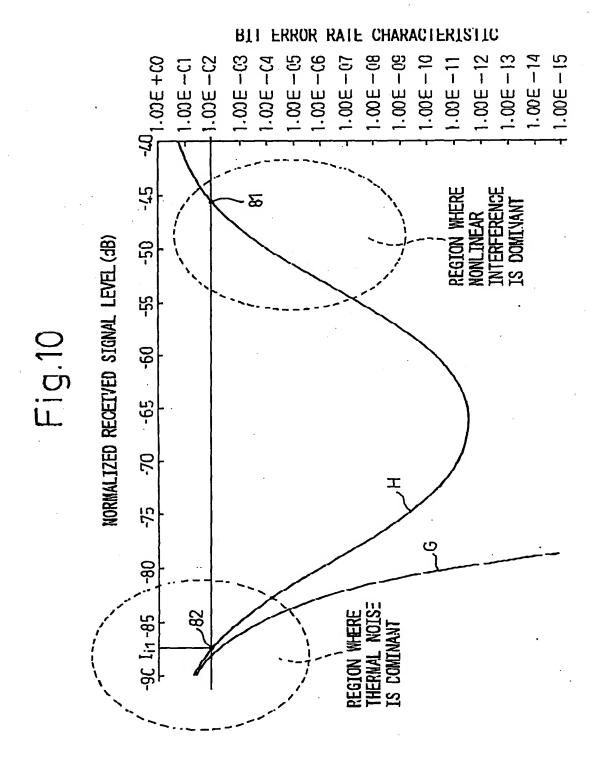



Fig.11

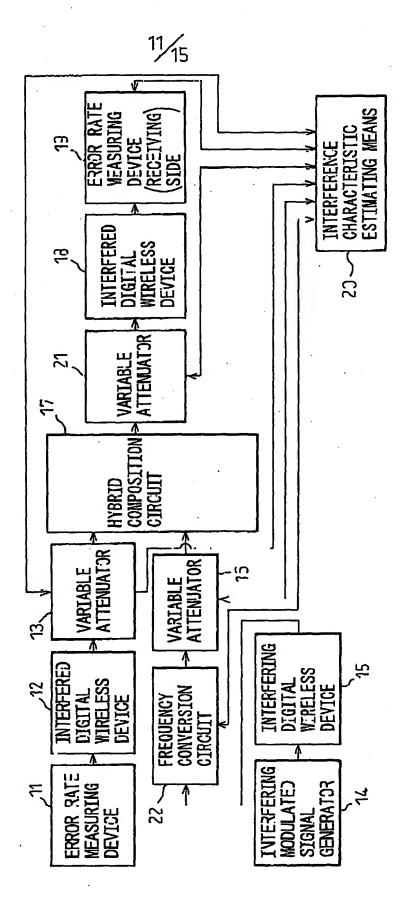

12/15

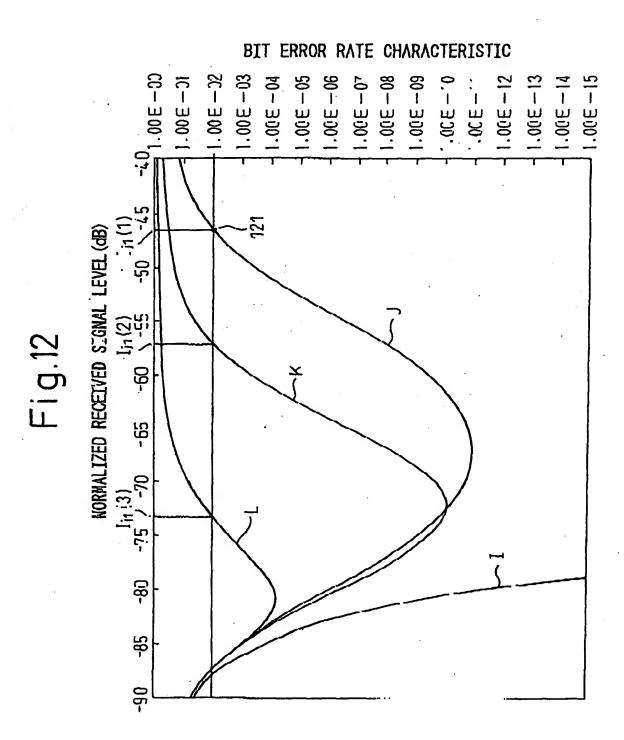

13/15

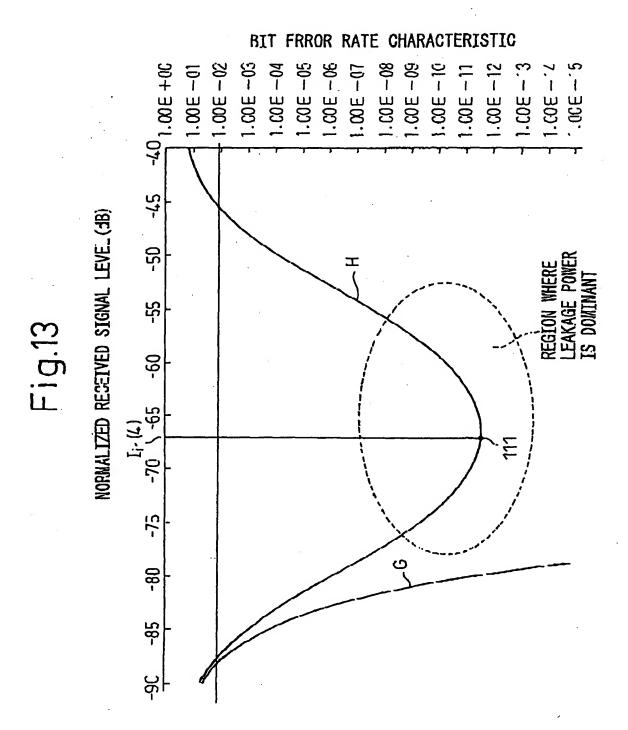

14/15

BIT ERROR RATE CHARACTERISTIC

